

Leading viscosimetry technology

ROTATIONAL VISCOMETERS

Alpha series

Alpha series rotational viscometers allow fast and accurate viscosity readings. They are low budget and easy to use.

2 YEARS WARRANTY

Standard Delivery

Viscometer head with serial number / Stand, 3 levelling adjustment for stand / Boss head / Standard spindles / Spindle protector / Spindle rack / Power supply cable / Calibration Certificate / Operating manual

Extra Accessories

APM (Small Sample Adapter) / LCP (Low Viscosity Adapters) / Heldal unit (High Viscosity Adapter) / Silicon Standard Oils / Thermostatic Bath / Universal adapter for all accessories such as Brookfield (Optional) / PPR Plugging System (Optional)

NOTE: The material of the accessories including the temperature probe can be changed under customer specification (High Temperature Resistance).

Smart Series



Expert Series



Premium Series



4 LINES LCD DISPLAY AND
KEYBOARD CONTROLS

LANGUAGE OPTIONS


English / French / German /
Catalan / Spanish / Italian /
Japanese / Polish /
Dutch / Portuguese

SOUND ALARM

Under or over range

UNIVERSAL ADAPTER

All accessories
such as Brookfield
(Optional)

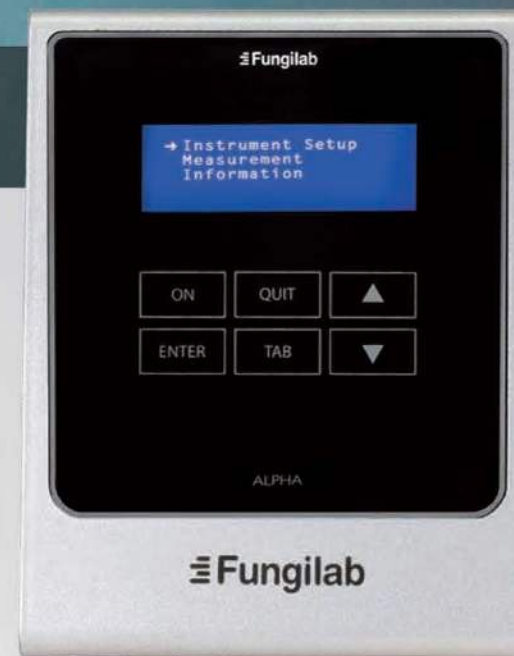

FRIENDLY USER

AUTO RANGE

Display of maximum
measurable limits

DISPLAYED INFO

Viscosity (cP or mPa-s)
% Torque
Spindle
Speed

AUTO-TEST

It checks the internal
function in order to make
the unit ready to use



Main Features

- > Data displayed

Selected speed	r.p.m
Selected spindle	SP
Viscosity reading	cP (mPa•s)
Percentage of full scale	%
- > Relative and absolute viscosity.
- > Unit converter SI to CGS.
- > AUTO-TEST with sound and visual malfunction alarm.
- > AUTO-RANGE function.
- > User-enabled calibration.
- > 10 language options.

Standard delivery: The equipment is supplied complete with standard spindles (4 spindles for L model, and 6 spindles for R and H models), viscometer stand and spindle protector.

Technical File

- > Precision: $\pm 1\%$ of full scale.

- > Resolution:
 - Using low viscosity adapter: 0.01
 - For lower than 10.000 viscosity cP: 0.1
 - For viscosity equal to or above 10.000 cP: 1
- > Repeatability: 0.2%
- > Supplied at 100-240 VAC, 50/60 Hz

Spindles

AISI 316 stainless steel spindles, easily identified by number and letter when changed according to range of viscosity.

These are the standards our units follow:

- BS: 6075, 5350
- ISO: 2555, 1652
- ASTM: 115, 789, 1076, 1084, 1286, 1417, 1439, 1638, 1824, 2196, 2336, 2364, 2393, 2556, 2669, 2849, 2983, 2994, 3232, 3236, 3716



Easy identification, on your first look at the equipment, you identify it.



Detail of the 4 lines LCD and the keyboard controls. Unit menu is clearly showed.

Code	Model	Measuring Range (cP)	Speed (r.p.m.)	Number of speeds
V100003	ALPHA L	20 - 2.000.000	0.3 - 100	18
V100002	ALPHA R	100 - 13.000.000	0.3 - 100	18
V100001	ALPHA H	200 - 106.000.000	0.3 - 100	18



Fapa s.a.s.
 Via Pascoletto, 20
 24040 Lallio (BG)
 Tel. 035.6221219
 Fax. 035.4372675
 fapa@fapa.bg.it
 www.fapa.bg.it